



# HANSON RIVET

& SUPPLY CO.  
13241 Weidner Street  
Pacoima, CA 91331

See pages D42-D47 for  
installation tools

Phone: 818-485-0500


FAX: 818-485-0540

Outside CA: 1-800-RRRIVET

www.hansonrivet.com



## BLIND RIVETS

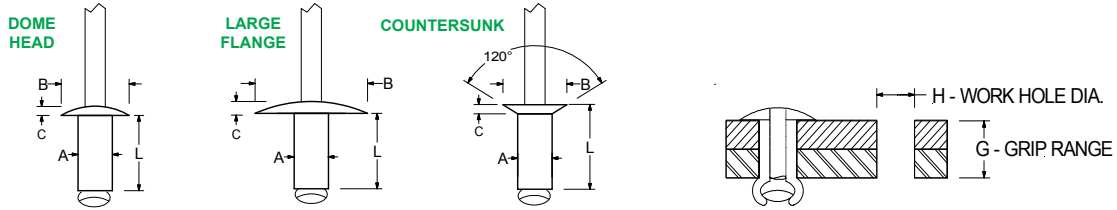

RIVET MATERIAL MANDREL MATERIAL	HEAD STYLE	PART NUMBER	POP®	Avdel®	BODY DIAMETER "A"	WORK HOLE & DRILL SIZE "H"	GRIP RANGE "G"	BODY LENGTH (MAX.) "L"	HEAD DIAMETER (NOM.) "B"	HEAD HEIGHT (MAX.) "C"	TYPICAL ULTIMATE STRENGTHS IN LBS. (SEE NOTE)						
											SHEAR	TENSILE					
<b>ALUMINUM RIVET PLAIN FINISH</b>	<b>DOME HEAD</b>	PAAD302	AD32ABS	AAPS-03-02	.094	.097/.100	.031-.125	.240	.188	.032	85	135					
		PAAD304	AD34ABS	AAPS-03-04	<b>3/32</b>	#41	.126-.250	.365									
		PAAD306	AD36ABS	AAPS-03-06			.251-.375	.490									
		PAAD401	AD41ABS	AAPS-04-01	<b>1/8</b>	#30	.031-.062	.203	.250	.040	155	235					
		PAAD402	AD42ABS	AAPS-04-02			.063-.125	.265									
		PAAD403	AD43ABS	AAPS-04-03			.126-.187	.328									
		PAAD404	AD44ABS	AAPS-04-04			.188-.250	.390									
		PAAD405	AD45ABS	AAPS-04-05			.251-.312	.453									
		PAAD406	AD46ABS	AAPS-04-06			.313-.375	.515									
		PAAD408	AD48ABS	AAPS-04-08			.376-.500	.640									
		PAAD410	AD410ABS	AAPS-04-10			.501-.625	.765									
		PAAD502	AD52ABS	AAPS-05-02	<b>5/32</b>	#20	.063-.125	.290	.312	.047	225	350					
		PAAD503	AD53ABS	AAPS-05-03			.126-.187	.353									
		PAAD504	AD54ABS	AAPS-05-04			.188-.250	.415									
		PAAD506	AD56ABS	AAPS-05-06			.251-.375	.540									
	PAAD508	AD58ABS	AAPS-05-08	.376-.500			.665										
	PAAD510	AD510ABS	AAPS-05-10	.501-.625			.770										
	PAAD602	AD62ABS	AAPS-06-02	<b>3/16</b>	#11	.063-.125	.315	.375	.055	315	500						
	PAAD604	AD64ABS	AAPS-06-04			.126-.250	.440										
	PAAD606	AD66ABS	AAPS-06-06			.251-.375	.565										
	PAAD608	AD68ABS	AAPS-06-08			.376-.500	.690										
	PAAD610	AD610ABS	AAPS-06-10			.501-.625	.815										
	PAAD612	AD612ABS	AAPS-06-12			.626-.750	.940										
	PAAD614	AD614ABS	AAPS-06-14			.751-.875	1.065										
	PAAD616	AD616ABS	AAPS-06-16			.876-1.000	1.190										
	PAAD802	AD82ABS	AAPS-08-02			<b>1/4</b>	F					.062-.150	.350	.500	.073	600	750
	PAAD804	AD84ABS	AAPS-08-04									.063-.250	.490				
	PAAD806	AD86ABS	AAPS-08-06	.251-.375	.615												
	PAAD808	AD88ABS	AAPS-08-08	.376-.500	.740												
	PAAD810	AD810ABS	AAPS-08-10	.501-.625	.865												
PAAD812	AD812ABS	AAPS-08-12	.626-.750	.990													
PAAD814	AD814ABS	AAPS-08-14	.751-.875	1.120													
PAAD816	AD816ABS	AAPS-08-16	.876-1.000	1.245													
PAAL402	AD42ABSLF	AALS-04-02	<b>1/8</b>	#30	.031-.125	.265	.375	.045	155	235							
PAAL403	AD43ABSLF	AALS-04-03			.126-.187	.313											
PAAL404	AD44ABSLF	AALS-04-04			.126-.250	.390											
PAAL406	AD46ABSLF	AALS-04-06			.251-.375	.515											
PAAL504	AD54ABSLF	AALS-05-04	<b>5/32</b>	#20	.126-.250	.415	.468	.075	225	350							
PAAL506	AD56ABSLF	AALS-05-06			.251-.375	.540											
PAAL508	AD58ABSLF	AALS-05-08			.376-.500	.675											
PAAL604	AD64ABSLF	AALS-06-04	<b>3/16</b>	#11	.063-.250	.450	.625	.092	315	500							
PAAL606	AD66ABSLF	AALS-06-06			.251-.375	.565											
PAAL608	AD68ABSLF	AALS-06-08			.376-.500	.690											
PAAL610	AD610ABSLF	AALS-06-10			.501-.625	.815											
PAAL612	AD612ABSLF	AALS-06-12			.626-.750	.940											
PAAL616	AD616ABSLF	AALS-06-16			.876-1.000	1.175											
PAAL618	AD618ABSLF	AALS-06-18			1.00-1.125	1.325											
PAAL618	AD618ABSLF	AALS-06-18			1.00-1.125	1.325											
PAAK302	AK32ABS	AACS-03-02	<b>3/32</b>	#41	.094	.097/.100	.031-.125	.250	.174 REF.	.039 MAX	85	135					
PAAK304	AK34ABS	AACS-03-04			.126-.250	.375											
PAAK402	AK42ABS	AACS-04-02	<b>1/8</b>	#30	.125	.129/.133	.063-.125	.265	220 REF.	.051 MAX	155	235					
PAAK403	AK43ABS	AACS-04-03											.126-.187	.328			
PAAK404	AK44ABS	AACS-04-04											.188-.250	.390			
PAAK405	AK45ABS	AACS-04-05											.251-.312	.453			
PAAK406	AK46ABS	AACS-04-06											.313-.375	.515			
PAAK408	AK48ABS	AACS-04-08											.376-.500	.640			
PAAK410	AK410ABS	AACS-04-10											.501-.625	.765			
PAAK502	AK52ABS	AACS-05-02											<b>5/32</b>	#20	.156	.160/.164	.063-.125
PAAK504	AK54ABS	AACS-05-04	.126-.250	.415													
PAAK506	AK56ABS	AACS-05-06	.251-.375	.540													
PAAK604	AK64ABS	AACS-06-04	<b>3/16</b>	#11	.187	.192/.196	.126-.250	.425	.348 REF.	.071 MAX	315	500					
PAAK608	AK68ABS	AACS-06-08											.376-.500	.690			
PAAK616	AK616ABS	AACS-06-16											.876-1.000	1.190			
PAAK804	AK84ABS	AACS-08-04											.250	.257/.261	.063-.250	.490	484 REF.



**ALUMINUM  
MANDREL**

OTHER COLORS  
AND FINISHES AVAILABLE

NOTE: Values for typical ultimate strengths are a guide only and may vary greatly depending upon the application.

D15